

CASTORS & WHEELS

Rolling

at the speed of life



www.colson-castors.de

228a Swivel castor

Technical description

- Metal housing
- Zinc passivated
- Single-row ball race in fork head
- 00G...z, Polypropylene tyre black, solid bearing

Areas of application

- Shop fittings
- Display stands
- Small furniture



Further information at
www.colson-castors.de



228a	00G	025z	ZPS	25	14	39	18	47x47	35x35	6,5	15
228a	00G	030z	ZPS	30	15	42	18	47x47	35x35	6,5	15
228a	00G	035z	ZPS	35	18	48	18	47x47	35x35	6,5	25
228a	00G	040z	ZPS	40	18	57	23	57x57	43x43	6,5	35
228a	00G	045z	ZPS	45	18	60	23	57x57	43x43	6,5	35
228a	00G	050z	ZPS	50	19	62	23	57x57	43x43	6,5	40

340a/341a Swivel castor
345a/346a Fixed castor


340b Swivel castor with wheel locking brake
341h Swivel castor with total brake mounted behind

Technical description

- Sheet steel metal
- Zinc passivated
- Swivel bearing with double ball race
- 33G...b, solid rubber tyre blue-grey, Shore A 80, plastic wheel centre black, solid bearing
- also available with other wheel variants and fittings

Areas of application

- Display stands
- Garment stands
- Sales stands

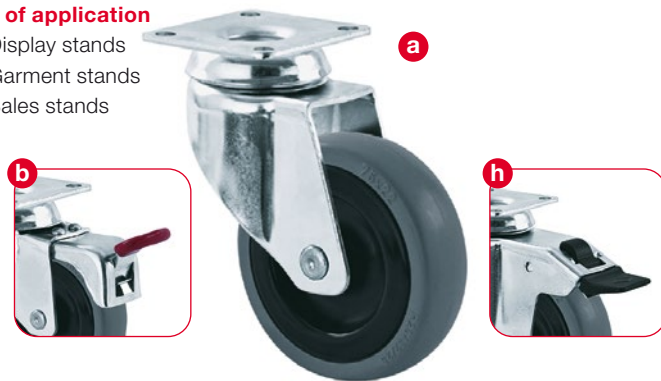

341a	340b	341h	345a	346a	346a	341h	341h	341h	341h	341h	341h	341h	341h
33G	050b	ZPB	50	18	70	24	54x54	40x40	6,3	40			
33G	075b	ZPC	75	23	103	37	60x60	47x47/37x37	6,3	50			
33G	100b	ZPC	100	23	124	28	60x60	47x47/37x37	6,3	65			
	345a	33G	050b	ZPB	50	18	70	54x54	40x40	6,3	40		
	346a	33G	075b	ZPC	75	23	103	60x60	47x47/37x37	6,3	50		
	346a	33G	100b	ZPC	100	23	124	60x60	47x47/37x37	6,3	65		

367a Swivel castor

367h Swivel castor with total brake mounted behind

Technical description

- Sheet steel metal
- Zinc passivated
- Swivel bearing with double ball race
- Protected from dust and water spray with plastic seal
- also available with bolt hole LC (10,2 mm)
- also available with other wheel variants and fittings

Areas of application

- Display stands
- Industrial kitchens
- Shop fittings

Further information at
www.colson-castors.de



367a	367h	29K	080r	ZLD	80	30	110	43,5	12,2	100
367a	367h	29K	100r	ZLD	100	30	131	41,5	12,2	100
367a	367h	29K	125r	ZLD	125	32	155,5	43,5	12,2	100
367a	367h	29K	150r	ZLD	150	32	182	51	12,2	120
367a	367h	29K	200r	ZLD	200	32	234	61	12,2	120







Technical description

- Sheet steel metal
- Zinc passivated
- Swivel bearing with double ball race
- also available with bolt hole LC (10,2 mm)
- on inquiry also available with threaded (ZGI) and flat pin (ZCS)
- solid rubber tyre iron grey RAL 7011, Shore A 80
- plastic wheel centre and plastic thread guard silver grey RAL 7001
- precision ball bearing
- also available with wheel diameter 75 mm and 100 mm and other wheel variants

Areas of application

- Shopping trolleys
- Sales stands



					fixation	
362a 36K 125b ZLD	125	32	155	38	12,2	100
362a 36K 125b ZGI	125	32	155	38	12x15	100
362a 36K 125b ZCS	125	32	155	38	choc	100

363b Swivel castor with wheel locking brake

Shopping trolley castors (autowalk)

Technical description

- Sheet steel metal
- Zinc passivated
- Swivel bearing with double ball race
- on inquiry also available with threaded (ZGI) and flat pin (ZCS)
- also available with a grey wheel (RAL 7011)

Areas of application

- Shopping trolleys (autowalk)



fixation



363b 62C125v ZLD

125

150

43

12,2

60

363b 62C125v ZGI

125

150

43

12x15

60

363b 62C125v ZCS

125

150

43

choc

60

E601a Swivel castor

E601h Swivel castor with total brake









Technical description

- TPE tyre
- Ball bearing
- wheel with thread guards
- Polyamid housing with fiber glass RAL 9002
- double ball bearing in swivel head
- on demand also available with directional lock

Areas of application

- Shop fittings
- Small furniture
- Display stands



							
E601a 35K100r KLD		100	30	135	40	12	80
	E601h 35K100r KLD	100	30	135	40	12	80
E601a 35K125r KLD		125	32	165	35	12	100
	E601h 35K125r KLD	125	32	165	35	12	100

441a Swivel castor

441h Swivel castor with total brake mounted behind

441i Swivel castor with total brake mounted in front

Technical description

- Stable sheet steel design and proven technology
- Easy running double ball bearing for good manoeuvrability
- Wide choice of wheels for different areas of application
- Can be fitted with different total locks
- Load capacity range from 50 - 205 kg/castor
- For wheel diameter 160+200 mm <<ASLaZ = screw-on directional lock>> is also available
- also as fixed castor (439a) available
- Solid rubber tyre black (Shore A 80)

- plastic wheel body
- roller bearing
- also available with other wheel variants

Areas of application

- Magazine carts
- Tool trolleys
- Transport containers



441a	441h	441i											
441a	441h		07R	080c	ZPH	80	20	107	34	104x80	72x52/80x60	9	50
441a	441h		07R	100c	ZPH	100	22	128	34	104x80	72x52/80x60	9	70
441a	441h		07R	125c	ZPH	125	22	152	32	104x80	72x52/80x60	9	100
441a	441h		07R	125c	ZPI	125	25	156	37	115x85	80x55/60	9	100
441a	441h	441i	07R	160c	ZPK	160	28	197	48	138x109	105x75/80	11	135
441a	441h	441i	07R	200c	ZPK	200	31	237	58	138x109	105x75/80	11	205

441a / 406a / E406a Swivel castor

Technische Beschreibung:

- 441 serie - zinc housing
- E406/406 - stainless steel housing
- wheel 03G with plain bearing and wheel 03K with ball bearing
- temperature resistance: 300 °C (short term)

Areas of application

- Bakery
- Industrial kitchens



temperature resistance
up to 300 °C



441a	03G	080sh	ZPH	80	35	107	34	104x84	72x52/80x60	9	80
441a	03G	100sh	ZPH	100	35	128	38	104x84	72x52/80x60	9	100
E406a	03G	080sh	EPS	80	35	108	32	99x80	80x60	9	80
E406a	03G	100sh	EPS	100	35	128	32	99x80	80x60	9	100
406a	03K	080sh	EPS	80	35	106	33	105x80	80x60	9	80
406a	03K	100sh	EPS	100	40	127	33	105x80	80x60	9	100

SOUPLINOX Swivel castor

Technical description:

- Rubber tyre - temperature resistance 280 °C for continuous effects and 300 °C for short terms
- Aluminium wheel centre
- Ball bearing
- Stainless steel housing with double ball race
- plate fitting 104x84 mm and hole distance 80x60 mm
- 2 different heights available: 106 and 123 mm

Areas of application

- Bakery
- Industrial kitchens

temperature resistance
up to 300 °C



SOUPLINOX 90 NM H123

90

40

123

30

104x84

80x60

9

80

SOUPLINOX 90 NM H106

90

40

106

30

104x84

80x60

9

80

Colson Group Europe



Germany

Colson Rollen GmbH
Industriestraße 8
42499 Hückeswagen

Tel. +49 (0)2192 9368 0
Fax +49 (0)2192 9368 477
info@colson-rollen.com
www.colson-castors.de

Polen

Colson Europe B.V. Sp. z. o. o.
ul. Fabianowska 101
62-052 Komorniki

Tel. +48 (0) 61 8667 012
Fax +48 (0) 61 8667 347
office@colson.pl
www.colson.pl

Großbritannien

Colson UK Limited
Bagnall Street, Hill Top
West Bromwich B70 0TS

Tel. +44 (0) 121 556 7221
Fax +44 (0) 121 502 2658
info@colson-castors.co.uk
www.colson-castors.co.uk

Frankreich

COLSON S.A.S
424 Av. de la Couronne
78681 Epône Cédex

Tel. +33 (0)1 30 95 55 45
Fax +33 (0)1 30 95 21 60
info@rhombus.fr
www.rhombus.fr

Niederlande

Colson Europe B.V.
Generatorstraat 11
3903 LH Veenendaal

Tel. +31 (0) 318 53 66 11
Fax +31 (0) 318 52 68 76
info@colson-europe.com
www.colson-europe.com

Italien

Colson Italia srl
Via Ancona 15bis
60035 Jesi (AN)

Tel. +39 (0) 338 364 1389
Fax +39 (0) 0731 22 6631
m.ciranna@colson.it
www.colson.it

Belgien

Colson Europe B.V.
Ringlaan 163
2170 Antwerpen

Tel. +32 (0)3 - 644 04 24
Fax +32 (0)3 - 645 72 44
infobe@colson-europe.com
www.colson-europe.com

Editorial

Editor: Sandra Longobardi
Concept/Text/Design: margo.eu
Photography: Barbotin, Delicious,
Studio De La Cloche



© Copyright:

Colson Rollen GmbH, February 2022
The reprinting or copying of this catalogue – or
parts thereof – is expressly forbidden without
prior permission from Colson.



Visit our website